

INGROUND 1-PISTON LIFT



TOP LIFT 1.35 TLH

SURFACE MOUNTED

Rubber pad pyramid 70 mm
102273 (optional accessories)



Length and **crosswise**
adjustable aluminum
slider plates

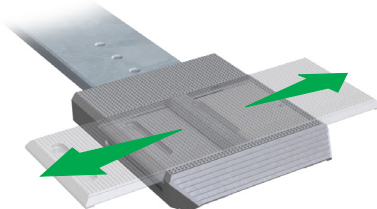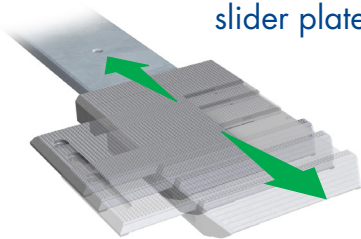

Drive over height
only 60 mm

TECHNICAL DATA


Capacity	3500 kg
Effective raise height	2045 mm
Drive over height	60 mm
Piston diameter	123 mm
Installation depth	2408 mm
Motor output	3,0 kW
Power connector	400 V/16 A
Cable length to control	11 m
Lifting time	≈ 35 sec.
Lowering time	≈ 35 sec.

Support 1.35 TLH plus galvanized 0016775

Installation cassette STEEL 1-piston
Installation cassette STEEL 1-piston galvanized 0016779


Lifting unit 3,5 t 1-piston - K
pre-assembled in installation cassette 0016777

Lifting unit 3,5 t 1-piston - H
packed in wooden box 0016782

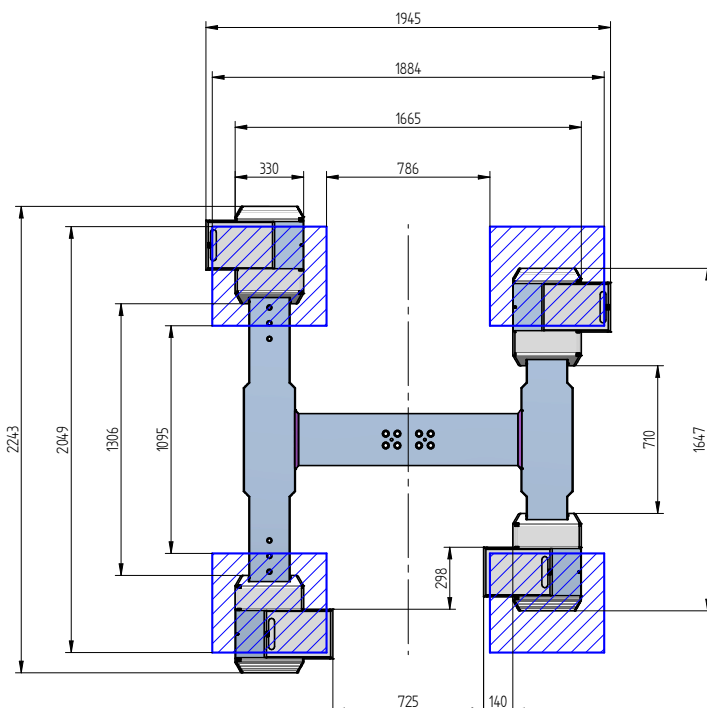





ACCESSORIES

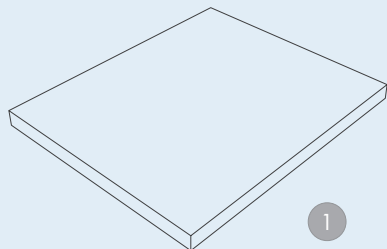


1



2



3



4

1 | Rubber pad
290 x 335 x 20 mm
0016740
(1 Set / 4 Pieces)

2 | Rubber pad
120 x 120 x 40 mm
0016739
(1 Set / 4 Pieces)

3 | Rubber pad pyramid
70 mm
0015742 (1 Set / 4 Pieces)

4 | Rubber pad pyramid
140 mm
0016738 (1 Set / 4 Pieces)