
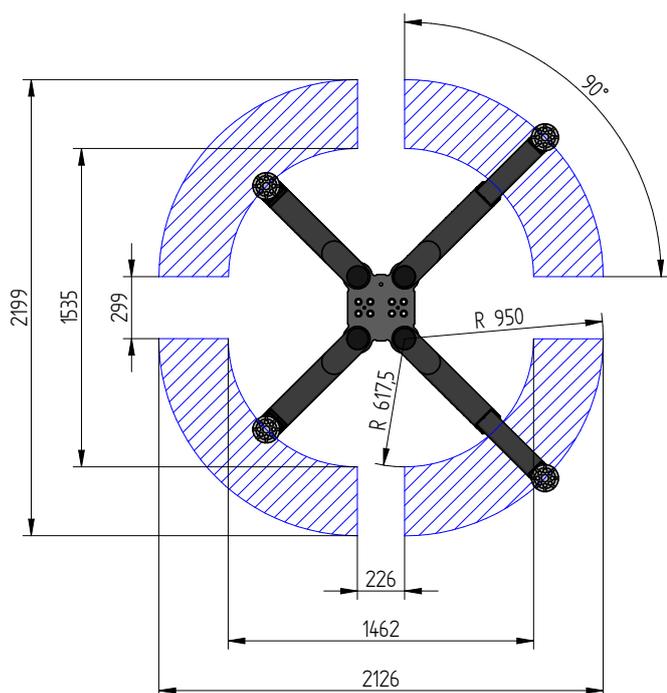


## INGROUND 1-PISTON LIFT

# TOP LIFT 1.35 TLX

## SURFACE MOUNTED

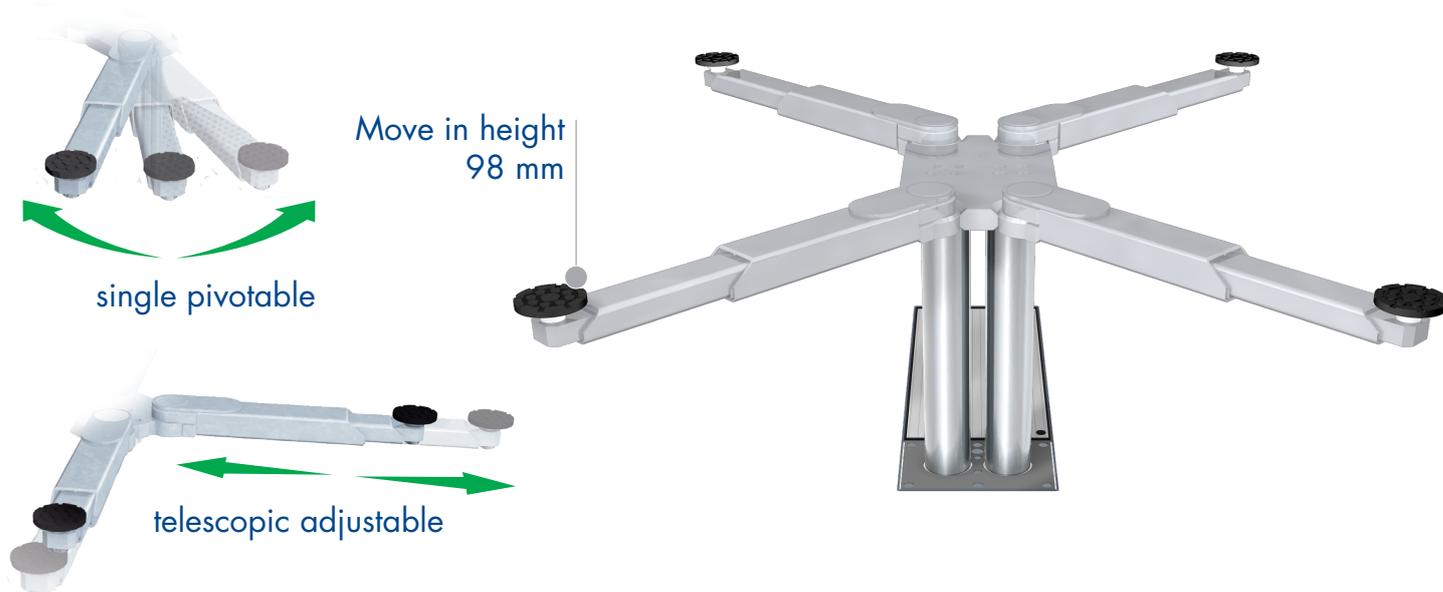

### TECHNICAL DATA


Capacity	3500 kg
Effective raise height	2067 mm
Move in height	98 mm
Piston diameter	123 mm
Installation depth	2408 mm
Motor output	3,0 kW
Power connector	400 V/16 A
Cable length to control	11 m
Lifting time	≈ 35 sec.
Lowering time	≈ 35 sec.

Support 1.35 TLX galvanized	0016774
Installation cassette STEEL 1-piston	
Installation cassette STEEL 1-piston galvanized	0016779
Lifting unit 3,5 t 1-piston - K pre-assembled in installation cassette	0016777
Lifting unit 3,5 t 1-piston - H packed in wooden box	0016782





## ACCESSORIES

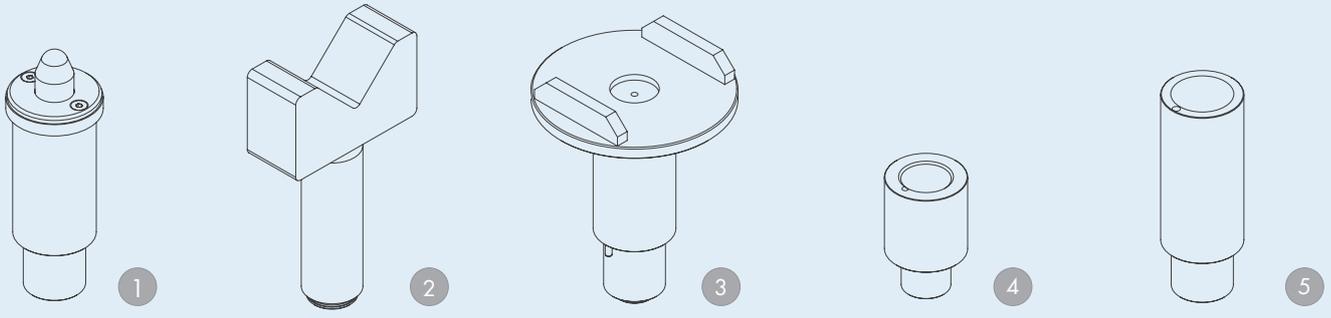

1 | **Stacking adapter NCV3**  
d 45 x d 70 / 125-250 mm  
0016743 (1set / 2 pcs.)

2 | **Stacking adapter V-prism**  
d 45 / 182-312 mm  
0016744 (1set / 2 pcs.)

3 | **Stacking adapter U-form**  
d 130 x d 45 / 193-295 mm  
0016745 (1set / 4 pcs.)

4 | **Stacking adapter extension**  
80 mm  
0016741 (1set / 4 pcs.)

5 | **Stacking adapter extension**  
130 mm  
0016742 (1set / 4 pcs.)