
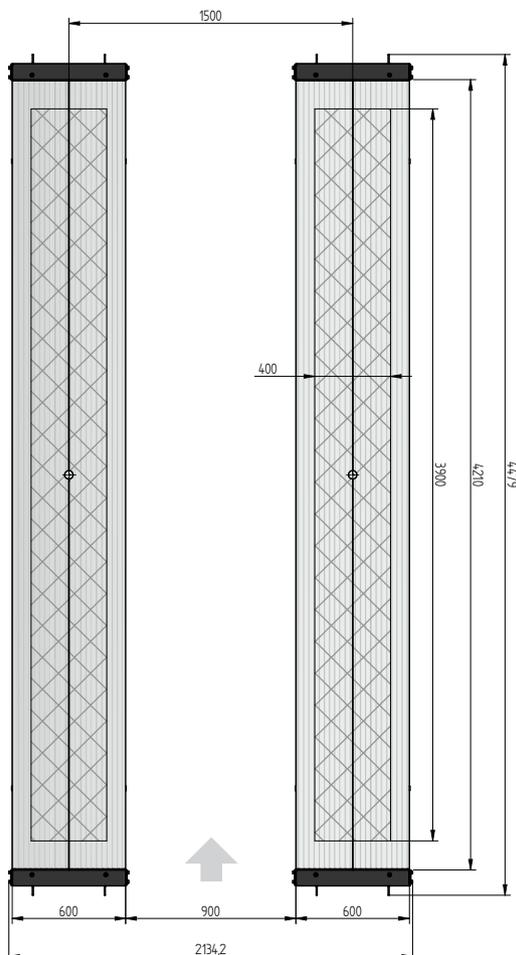


INGROUND 2-PISTON LIFT

TOP LIFT 2.35 TLA

FLUSH MOUNTED

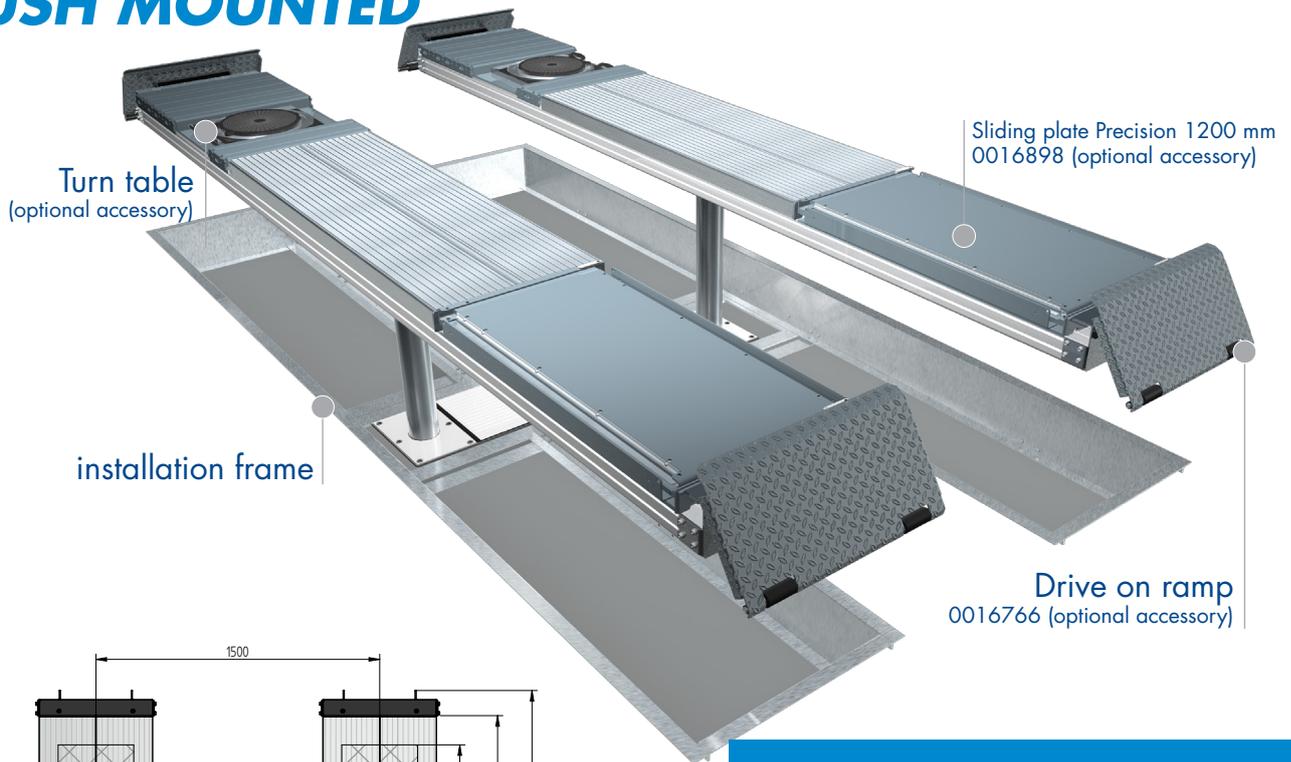

TECHNICAL DATA

capacity	3500	kg
effect. raise height	2008	mm
platform length	4400	mm
platform height	180	mm
piston diameter	123	mm
piston distance	1500	mm
installation depth	2443	mm
motor output	3,0	kW
power connector	400 V/16 A	
cable length to control	11	m
lifting time	≈ 35	sec.
lowering time	≈ 35	sec.

Platform 2.35 TLA with platform notches for turn tables and sliding plates 0016891

Platform 2.35 TLA 0016890


Installation cassette 1500 mm 0016892

Lifting unit 3,5 t 1500 mm - K pre-assembled in installation cassette 0016887

installation frame H 2-piston 4400 mm 0016894




ACCESSORIES

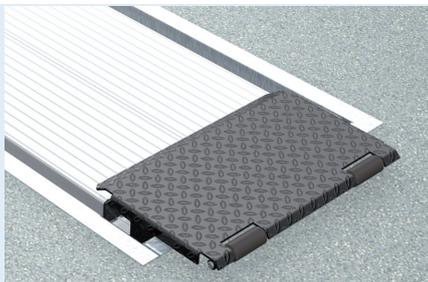

Drive on ramp

0016766

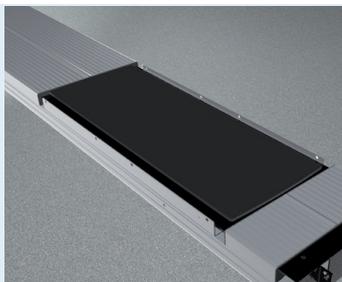

Sliding plate

Precision 1200 mm
0016898




Lighting

LED
0016900




Slide rail

4400 mm
0016899

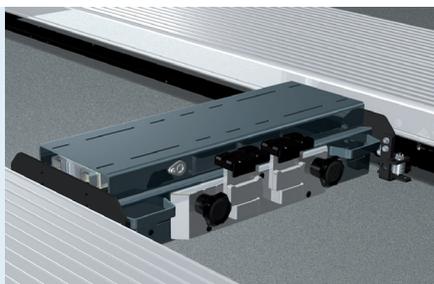


Axle Jack 2600 kg

pneumatic, without slide rails
0016767

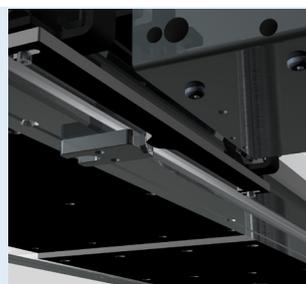


Park position

für Jack
0016768

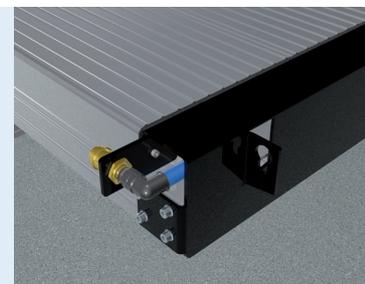

Compressed air supply

0016770

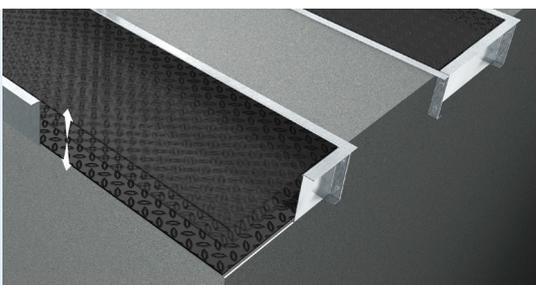


Autom. floor levelling system

2-Stempel 4400 mm
0016896



**Wheel alignment
supports telescopic**

0016771

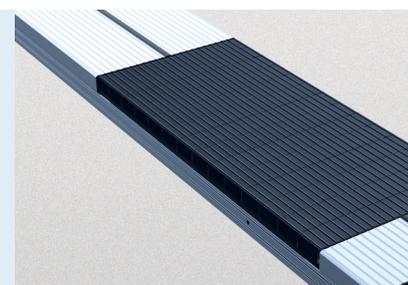

Rubber elements

50 mm 100 mm 200 mm
0017298 0017299 0017300