
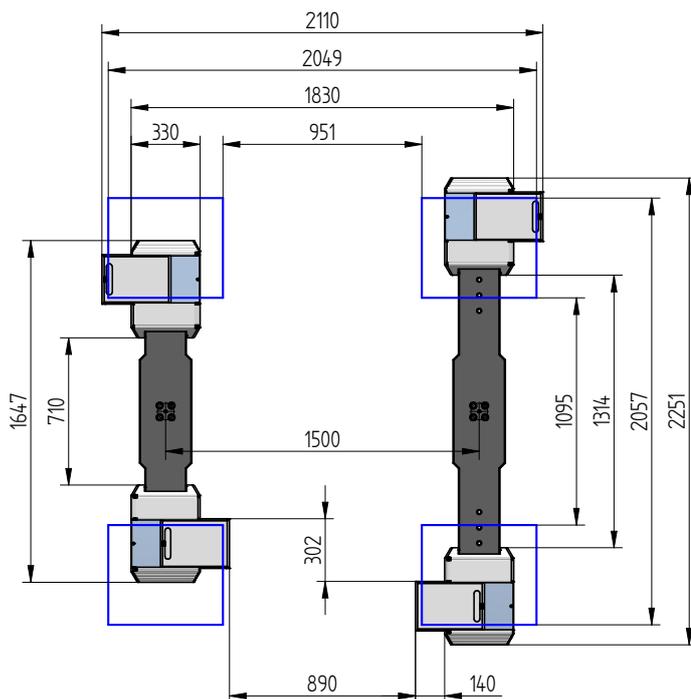


## INGROUND 2-PISTON LIFT

# TOP LIFT 2.35 TLDXY

### FLUSH MOUNTED

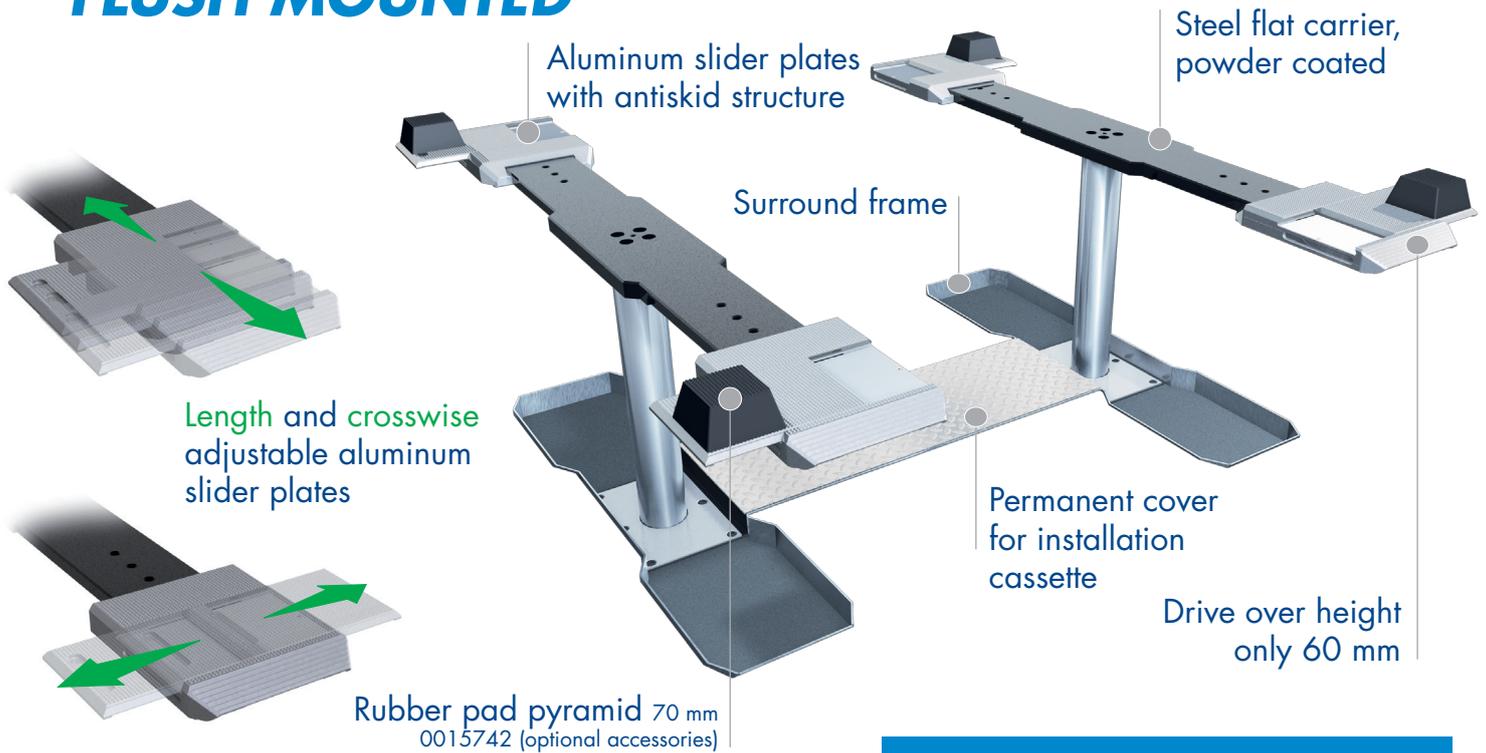

## TECHNICAL DATA

Capacity	3500 kg
Effective raise height	2023 mm
Drive over height	60 mm
Piston diameter	123 mm
Piston distance	1500 mm
Installation depth	2408 mm
Motor output	3,0 kW
Power connector	400 V/16 A
Cable length to control	11 m
Lifting time	≈ 35 sec.
Lowering time	≈ 35 sec.

Support 2.35 TLD XY 0015738


Installation cassette 1500 mm 0015739

Lifting unit 3,5 t 1500 mm - K  
pre-assembled in installation cassette 0016488


Surround frame 2.35 TLD XY 1500 0015741




## ACCESSORIES

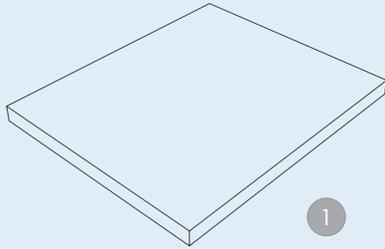


1



2



3




4

1 | **Rubber pad**  
290 x 335 x 20 mm  
0016740 (1Set / 4  
Pieces)

2 | **Rubber pad**  
120 x 120 x 40 mm  
0016739 (1Set / 4  
Pieces)

3 | **Rubber pad pyramid**  
70 mm  
0015742 (1Set / 4 Pieces)

4 | **Rubber pad pyramid**  
140 mm  
0016738 (1Set / 4 Pieces)

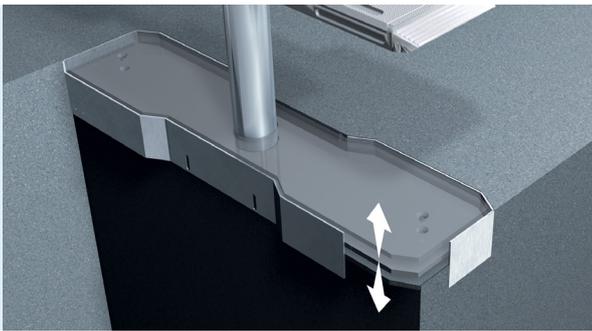

**Floor compensation 2.35 TLD XY**  
galvanized  
0016787



**Levelling plates 2.35 TLD XY**  
for flat surface of the carriers  
0016792 (1Set / 2 Pieces)

**Levelling wedges 2.35 TLD XY**  
for flat surface of the slider plates  
(1Set / 2 Pieces)