



INGROUND 2-PISTON LIFT

TOP LIFT 2.40 TLK

SURFACE MOUNTED




single pivotable

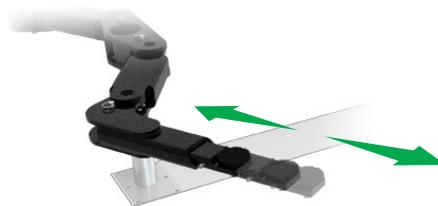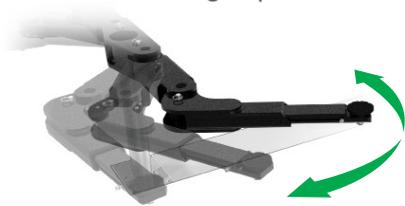

telescopic adjustable

powder coated
swivel arms

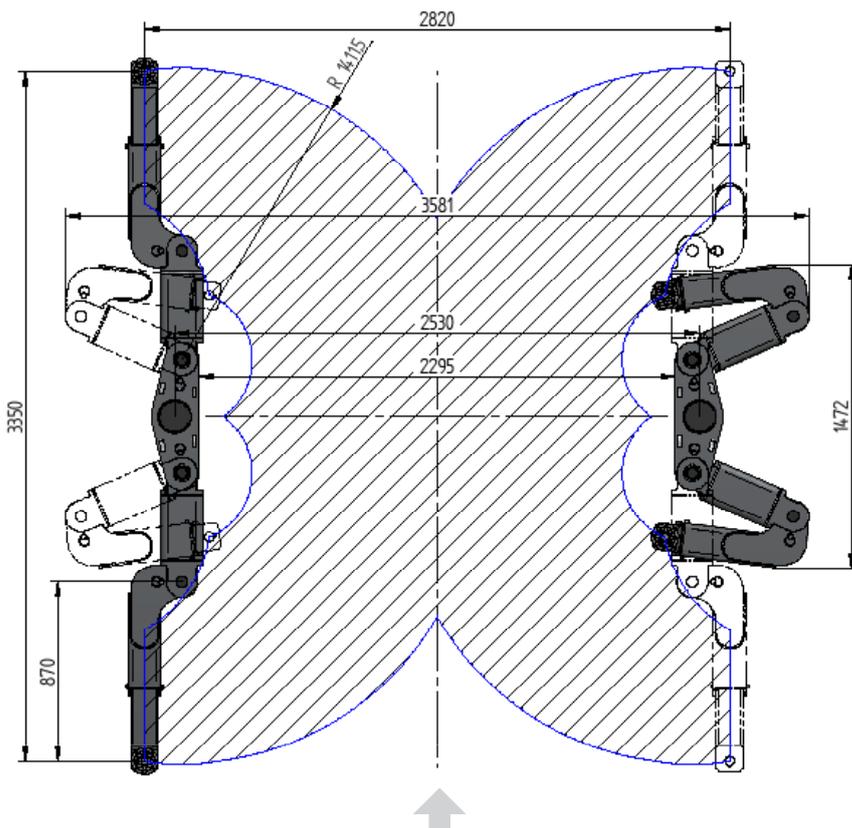

TECHNICAL DATA

Capacity	4000 kg
Effective raise height	2033 mm
Drive over height	96 mm
Piston diameter	123 mm
Piston distance	2530 mm
Installation depth	2408 mm
Motor output	3,0 kW
Power connector	400 V/16 A
Cable length to control	11 m
Lifting time	≈ 35 sec.
Lowering time	≈ 35 sec.

Arms 2.40 TLK 0017063
Installation cassette 2530 mm 0016268

Lifting unit 4.0 + 2530 mm - K pre-assembled in installation cassette 0016267



ACCESSORIES




1 | **Stacking adapter
NCV3**
d 45 x d 70 / 125-250 mm
0016743 (1Set / 2 Pieces)

2 | **Stacking adapter V-prism**
d 45 / 182-312 mm
0016744 (1Set / 2 Pieces)

3 | **Stacking adapter U-form**
d 130 x d 45 / 193-295 mm
0016745 (1Set / 4 Pieces)

4 | **Stacking adapter extension**
80 mm
0016741 (1Set / 4 Pieces)

5 | **Stacking adapter extension**
130 mm
0016742 (1Set / 4 Pieces)



**Bracket for stacking-
adapter extension**
0016751