
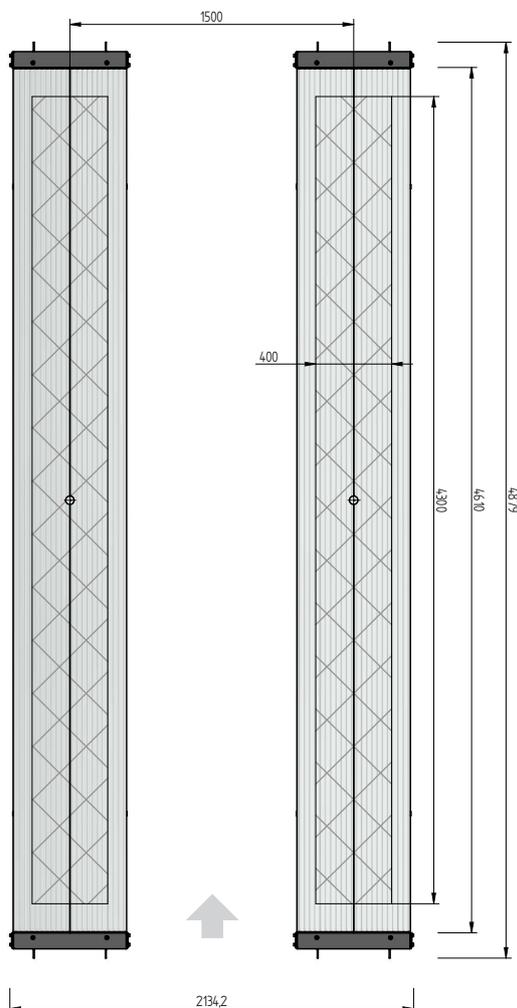


INGROUND 2-PISTON LIFT

TOP LIFT 2.50 TLA

FLUSH MOUNTED

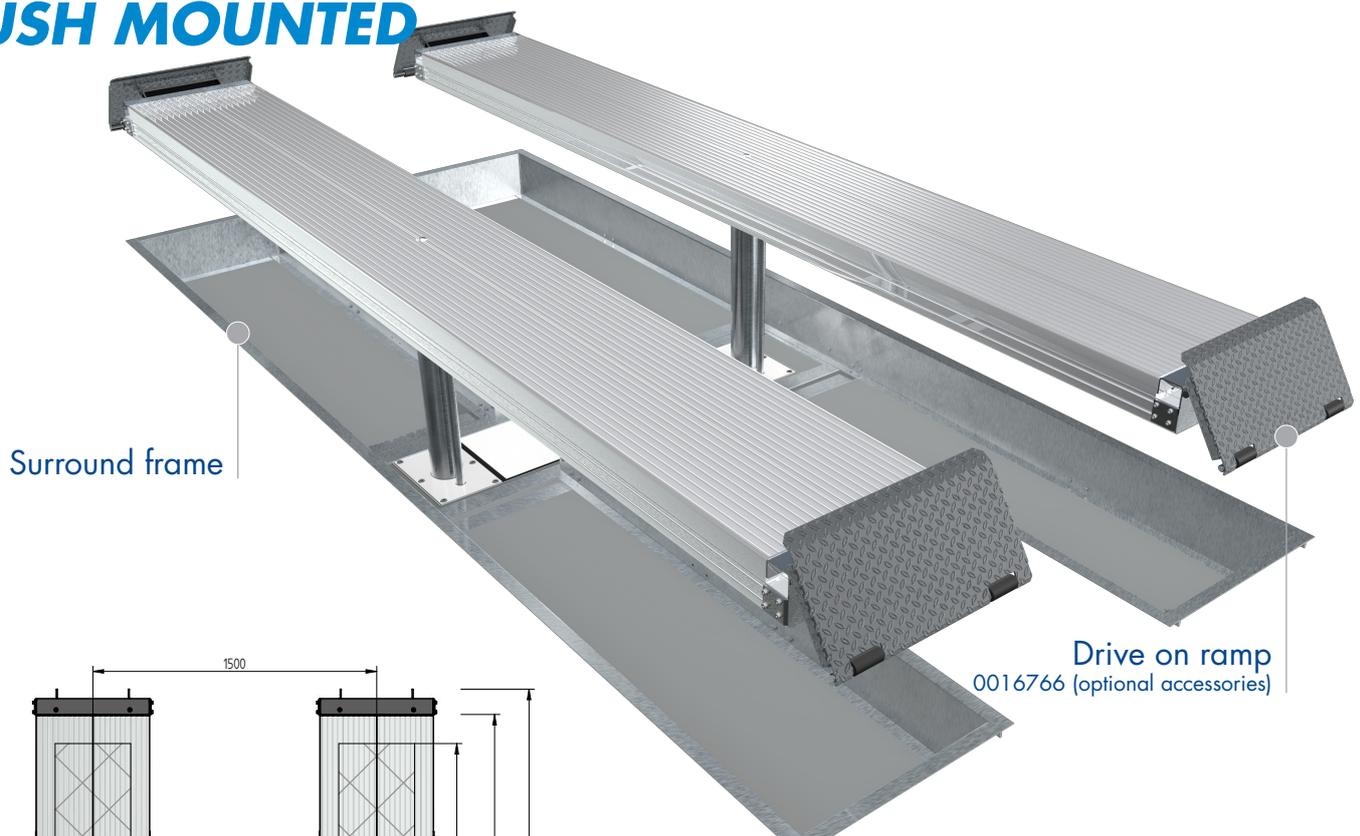

TECHNICAL DATA

capacity	5000 kg
effect. raise height	2019 mm
platform length	4800 mm
platform height	180 mm
piston diameter	123 mm
piston distance	1500 mm
installation depth	2443 mm
motor output	3,0 kW
power connector	400 V/16 A
cable length to control	11 m
lifting time	≈ 35 sec.
lowering time	≈ 35 sec.

Platform 2.50 TLA 0016919
 Installation cassettes 1500 mm 0016892

Lifting unit 5,0 t 1500 mm - K
 pre-assembled in installation cassette 0016916

Surround frame H 2-piston 4800 mm 0016914



ACCESSORIES



Drive on ramp

0016766



Slide rail

4800 mm


0016911



Lighting


LED

0016900

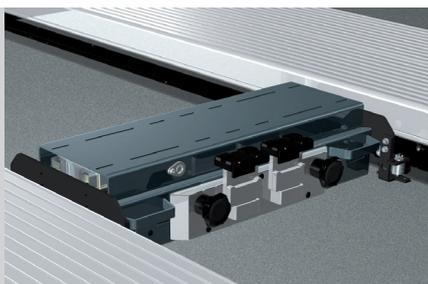

Axle Jack 2600 kg
pneumatic, without slide rails


0016767



Parkposition

for axle jack

0016768

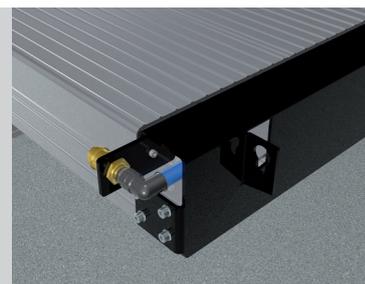

**Compressed
air supply**

0016770