


INGROUND 2-PISTON LIFT

TOP LIFT 2.50 TLK

SURFACE MOUNTED

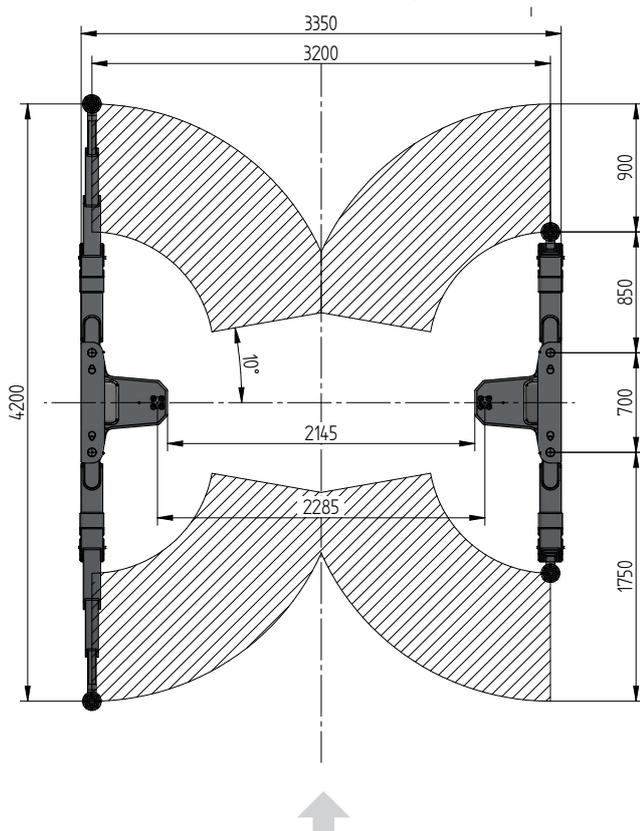

TECHNICAL DATA

Capacity	5000 kg
Effective raise height	2037 mm
Move in height	120 mm
Piston diameter	123 mm
Piston distance	2285 mm
Installation depth	2408 mm
Motor output	3,0 kW
Power connector	400 V/16 A
Cable length to control	11 m
Lifting time	≈ 35 sec.
Lowering time	≈ 35 sec.


Arms 2.50 TLK 0016800

Installation cassette 2285 mm 0015744

Lifting unit 5,0 t 2285 mm - K pre-assembled in installation cassette 0016590



ACCESSORIES




1

- 1 | Stacking adapter extension
80 mm
d 45 x 80 mm
0016741 (1Set / 4 Pieces)




2

- 2 | Stacking adapter extension
130 mm
d 45 x 130 mm
0016742 (1Set / 4 Pieces)




3

- 3 | Stacking adapter V-shape
d 45 / 182 - 312 mm
0016744 (1Set / 4 Pieces)



4

- 4 | Stacking adapter U-form
d 130 x d 45 / 193-295mm
0016745 (1Set / 4 Pieces)



- Bracket for stacking adapter extension
0016751



- Wheel lifting adapter
0016753 (1Set / 4 Pieces)