
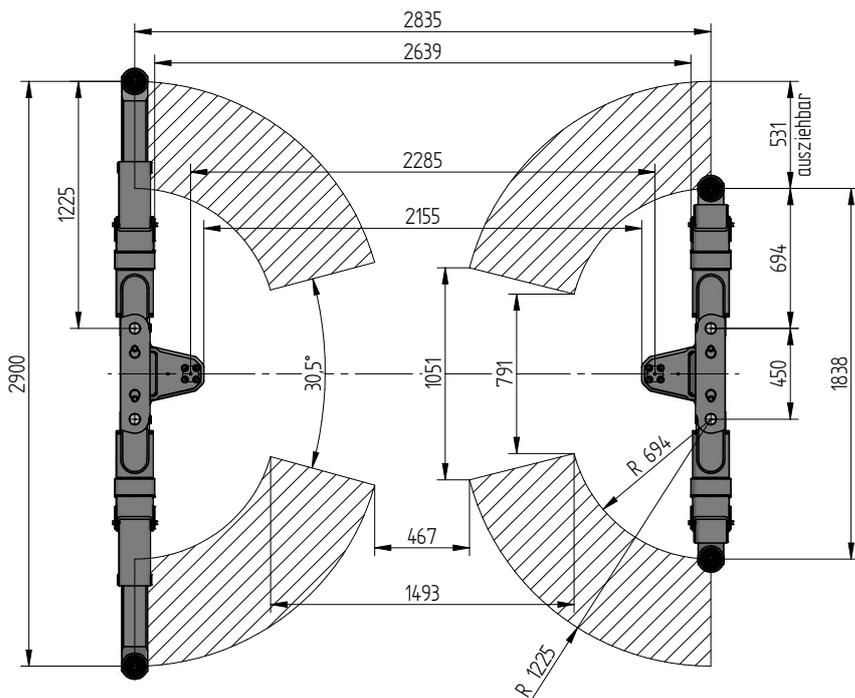


## INGROUND 2-PISTON LIFT

# TOP LIFT 2.50 TLK

## FLUSH MOUNTED

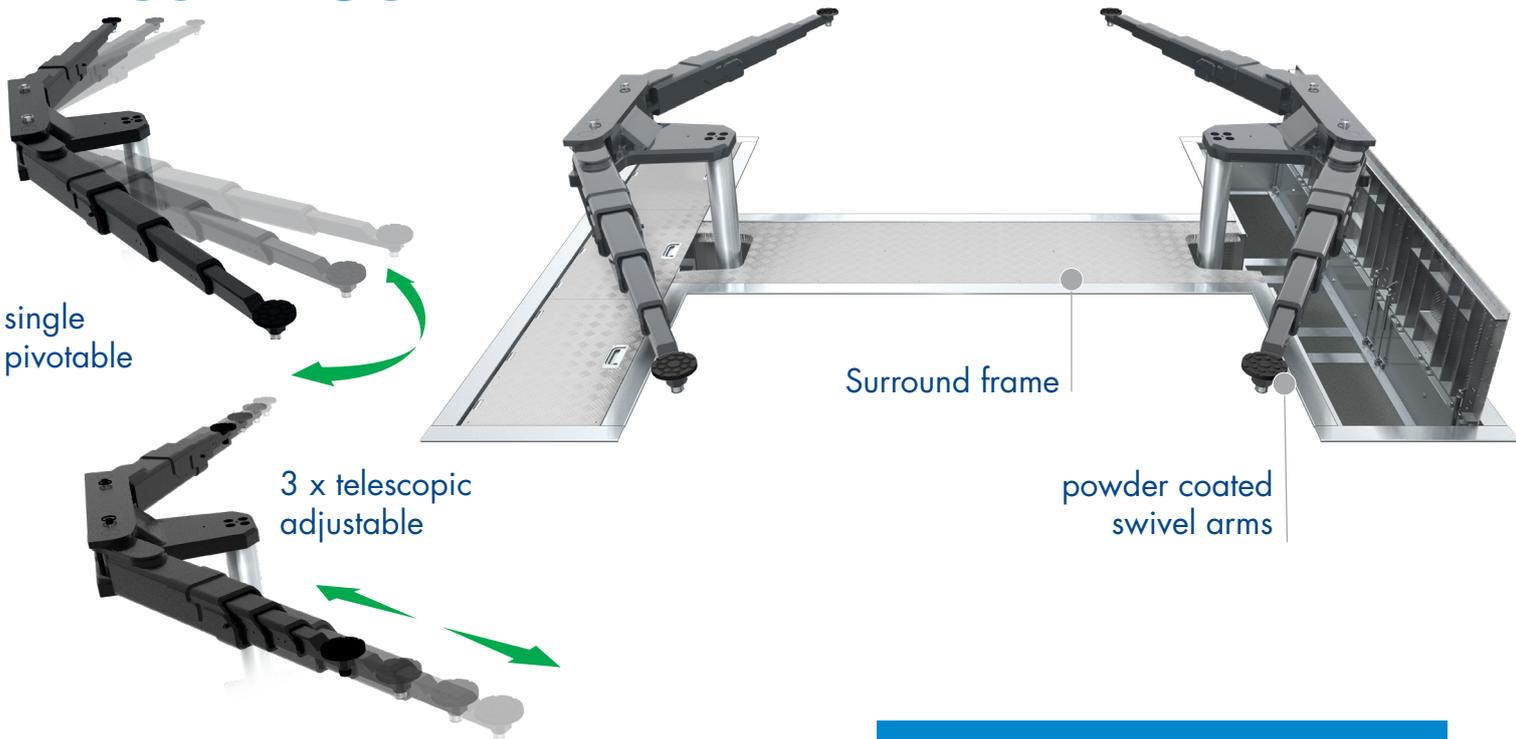

## TECHNICAL DATA

Capacity	5000 kg
Effective raise height	2037 mm
Move in height	120 mm
Piston diameter	123 mm
Piston distance	2285 mm
Installation depth	2408 mm
Motor output	3,0 kW
Power connector	400 V/16 A
Cable length to control	11 m
Lifting time	≈ 35 sec.
Lowering time	≈ 35 sec.


Arms 2.50 TLK 0016800  
 Installation cassette 2285 mm 0016795

Lifting unit 5,0 t 2285 mm - K  
 pre-assembled in installation cassette 0016799


Surround frame 2.50 TLK 2285 0016797




## ACCESSORIES




1



2



3



4

1 | Stacking adapter extension  
80 mm  
d 45 x 80 mm  
0016741 (1Set / 4 Pieces)

2 | Stacking adapter extension  
130 mm  
d 45 x 130 mm  
0016742 (1Set / 4 Pieces)

3 | Stacking adapter V-shape  
d 45 / 182 - 312 mm  
0016744 (1Set / 4 Pieces)

4 | Stacking adapter U-form  
d130 x d45 / 193-295mm  
0016745 (1Set / 4 Pieces)



Bracket for stacking adapter extension  
0016751



Wheel lifting adapter  
0016753 (1Set / 4 Pieces)