
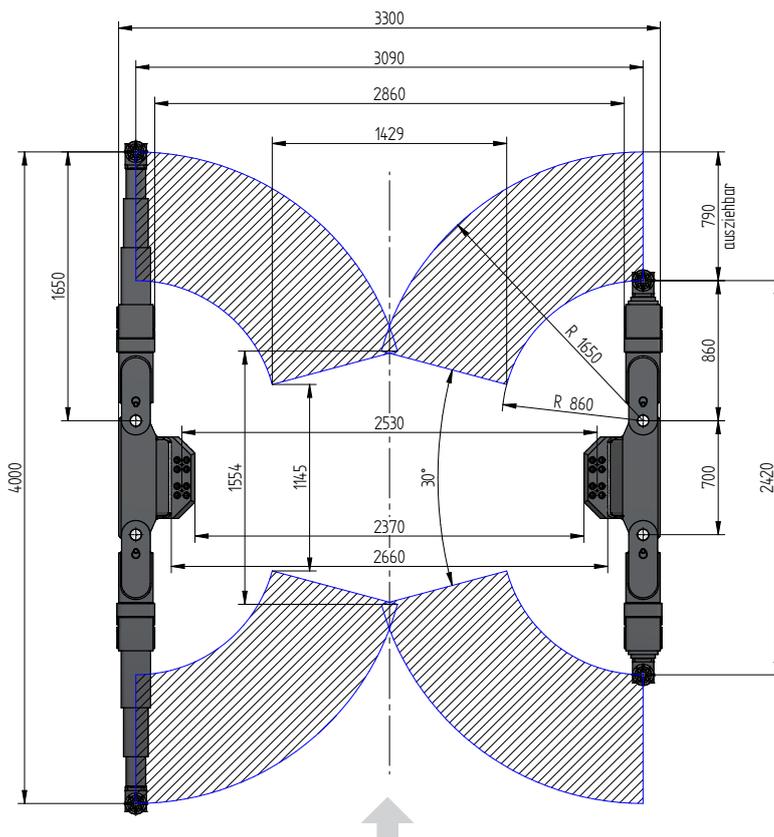


## INGROUND 2-PISTON LIFT

# TOP LIFT 2.65 TLK

## FLUSH MOUNTED

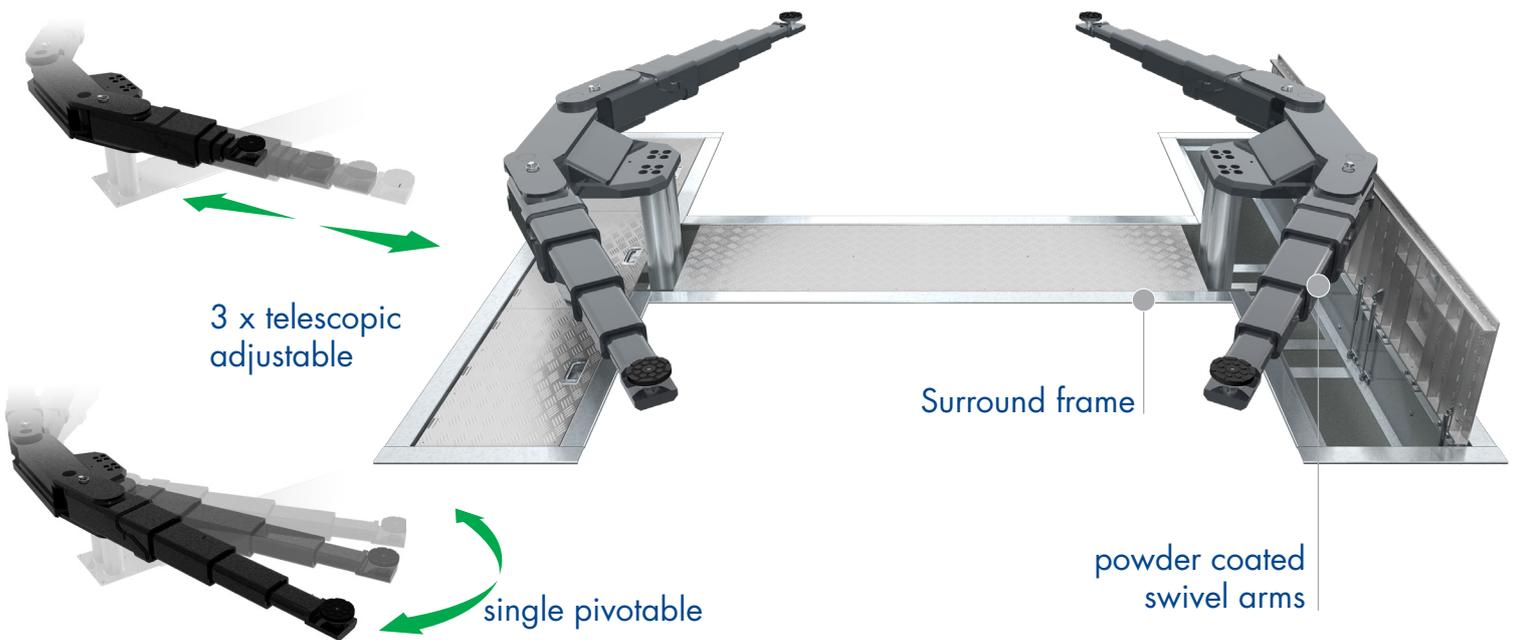

## TECHNICAL DATA

Capacity	6500 kg
Effective raise height	2074 mm
Move in height	150 mm
Piston diameter	123 mm
Piston distance	2530 mm
Installation depth	2408 mm
Motor output	3,0 kW
Power connector	400 V/16 A
Cable length to control	11 m
Lifting time	≈ 35 sec.
Lowering time	≈ 35 sec.

Arms 2.65 TLK 0016804


Installation cassette 2530 mm

Lifting unit 6,5 t 2530 mm - K  
pre-assembled in installation cassette


Surround frame 2530




## ACCESSORIES



1



2



3



4

1 | **Stacking adapter NCV3**

d 45 x d 70 / 125-250 mm

0016743 (1set / 2 pcs.)

2 | **Stacking adapter V-prism**

d 45 / 182-312 mm

0016744 (1set / 2 pcs.)

3 | **Stacking adapter U-form**


d 130 x d 45 / 193-295 mm

0016745 (1set / 4 pcs.)

4 | **Stacking adapter extension**

130 mm

0016742 (1set/ 4 pcs.)



**Bracket for stacking-  
adapter extension**

0016751



**Wheelfork adapter**

0016753 (1Set / 4 Pieces)