


INGROUND 4-PISTON LIFT

TOP LIFT 4.40 TLAD

FLUSH MOUNTED

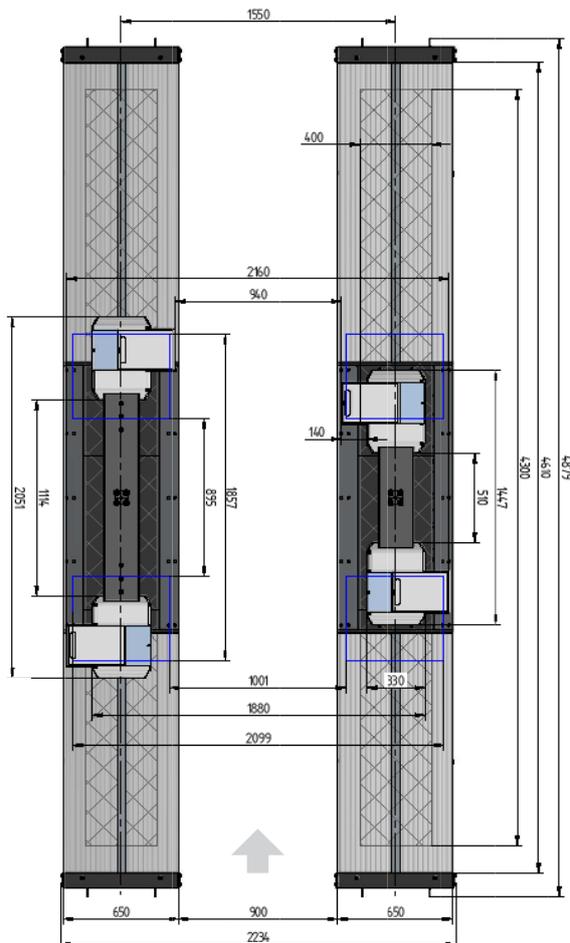

TECHNICAL DATA

capacity	4000 kg
wheel free lift	3500 kg
effect. raise height	2008 mm
effect. raise height wheel free lift	1982 mm
platform length	4800 mm
platform height	180 mm
drive over height wheel free lift	60 mm
piston diameter	123 mm
piston distance	1550 mm
installation depth	2443 mm
motor output	3,0 kW
power connector	400 V/16 A
cable length to control	11 m
lifting time	≈ 35 sec.
lowering time	≈ 35 sec.

Platform 4.40 TLAD with platform notches for wheel free lift flush with runway 0016944

Platform 4.40 TLAD with platform notches for wheel free lift flush with runway, turn tables and sliding plates 0016945

Installation cassettes 1550 mm 0016942

Lifting unit 4,0 t / 3,5 t 1550 mm - K pre-assembled in installation cassette 0016941

Surround frame 4.40 TLAD 4800 mm 0016947




ACCESSORIES




Drive on ramp

0016766




Sliding plate

Precision 1400 mm
 0016939



Lighting

LED
 0016903

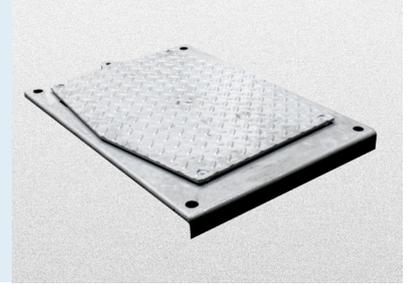


Playdetector




Slide rail

4800 mm
 0016911

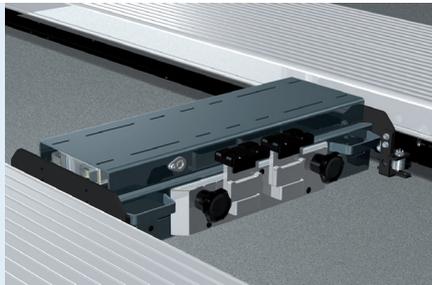


Axle Jack 2600 kg

pneumatic, without slide rails
 0016767




Parkposition

for axle jack
 0016768

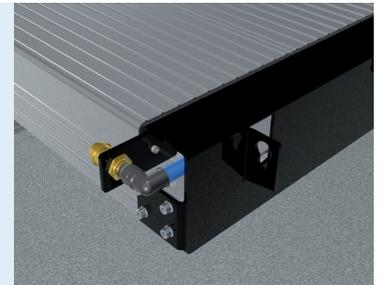


Compressed air supply

0016770

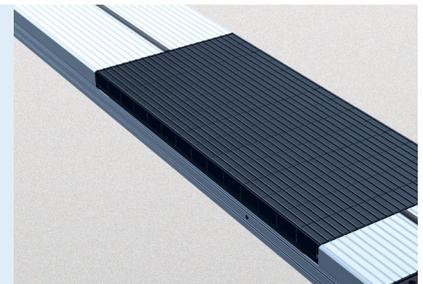

Rubber elements

50 mm 100 mm 200 mm
 0017301 0017302 0017303

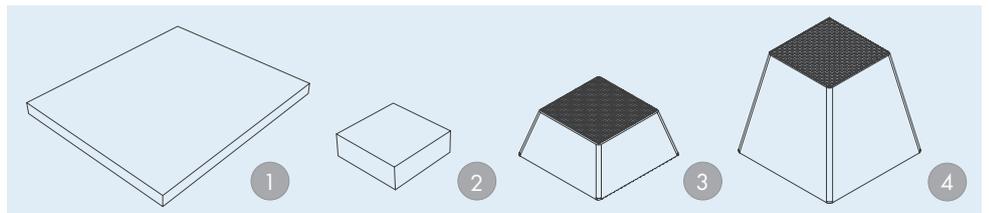

Rubber pads

1 | 290 x 335 x 20 mm 2 | 120 x 120 x 40 mm
 0016740 0016739

Rubber pads Pyramid

3 | 70 mm 4 | 140 mm
 0015742 0016738

Techn. Änderungen und Fehler vorbehalten.
 Gilt ab 01 2022 ©
 Nussbaum Custom Lifts GmbH | Hertzstr.6
 77694 Kehl | Germany
 Tel.: +49 (0) 7853 899-0 | Fax: +49 (0) 7853 8787
info@nussbaum-group.de | nussbaumlifts.com