
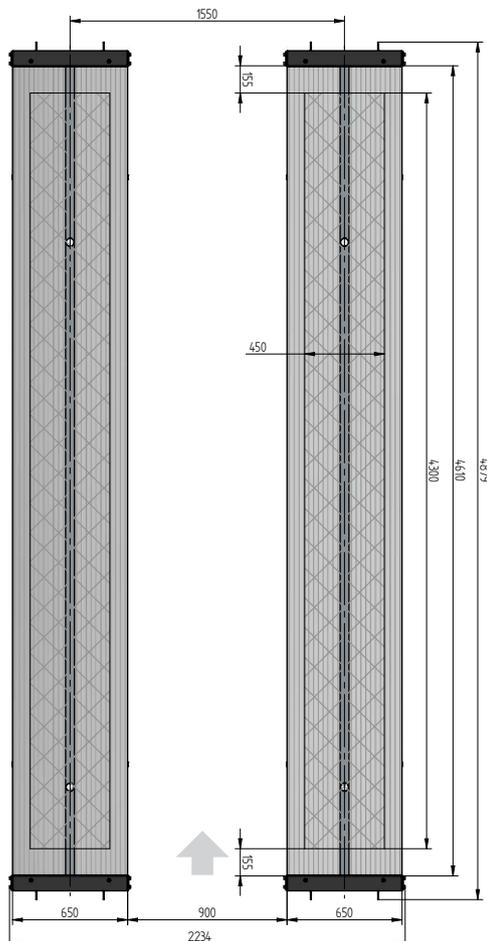


INGROUND 4-PISTON LIFT

TOP LIFT 4.40 TLA

BODENAUFLEIEND

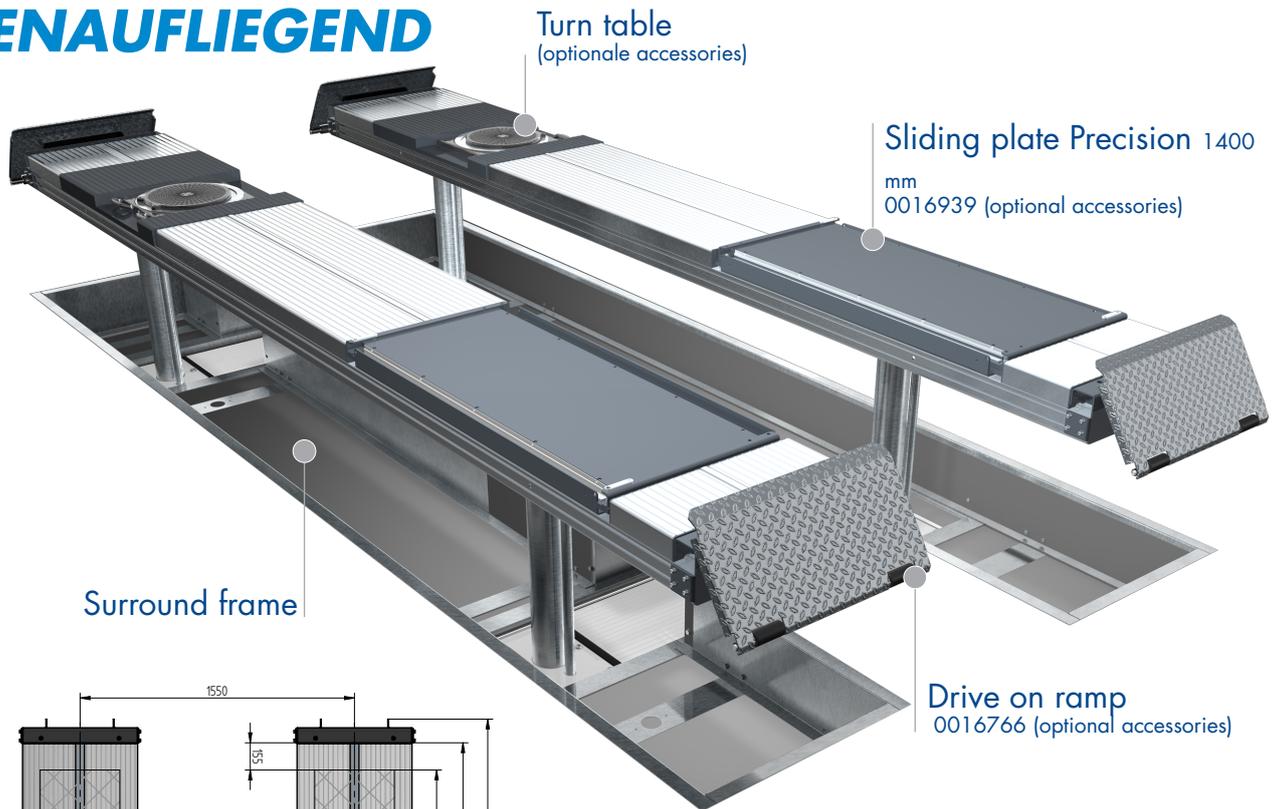

TECHNICAL DATA

capacity	4000 kg
effect. raise height	2008 mm
platform length	4800 mm
platform height	180 mm
piston diameter	123 mm
piston distance	1550 mm
installation depth	2443 mm
motor output	3,0 kW
power connector	400 V/16 A
cable length to control	11 m
lifting time	≈ 35 sec.
lowering time	≈ 35 sec.

Platform 4.40 TLA with platform notches for turn tables and sliding plates 0016935

Platform 4.40 TLA Installation cassettes 1550 mm 0016933 0016928

Lifting unit 4,0 t 1550 mm - K pre-assembled in installation cassette 0016931

Surround frame H 4800 mm 0016894




ACCESSORIES



Drive on ramp

0016766




Sliding plate

Precision 1400 mm
0016939



Lighting

LED
0016903

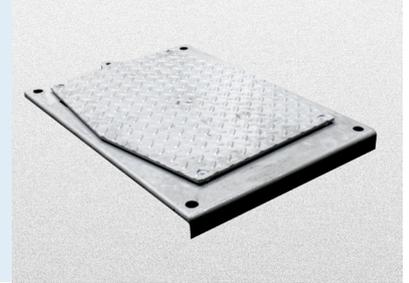


Play detector




Slide rail

4800 mm
0016911

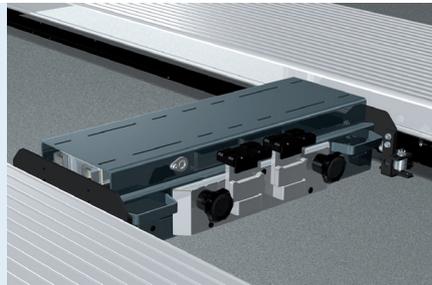


Axle Jack 2600 kg

pneumatic, without slide rails
0016767




Parking position

for axle jack
0016768

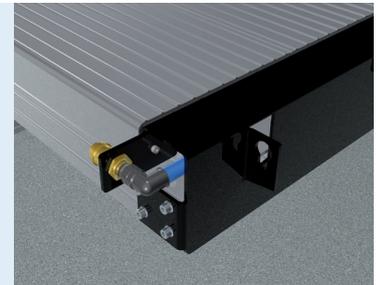

Compressed air supply


0016770

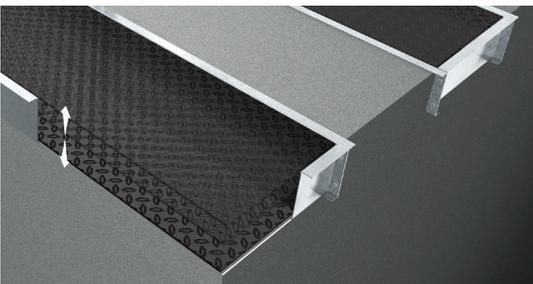

Autom. floor levelling

system

4-piston 4800 mm
0016936

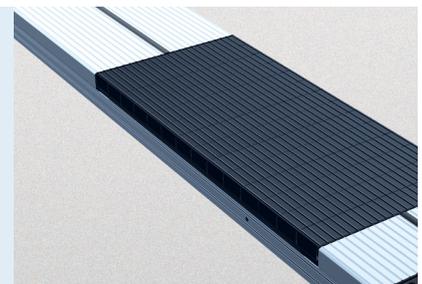

Rubber elements

50 mm 100 mm 200 mm
0017301 0017302 0017303