





We point out the minimum requirement of the foundation in our plans. The condition of the specific local situation (for example: ground under the foundation) does not lie our responsibility. If necessary an architect must be consulted.

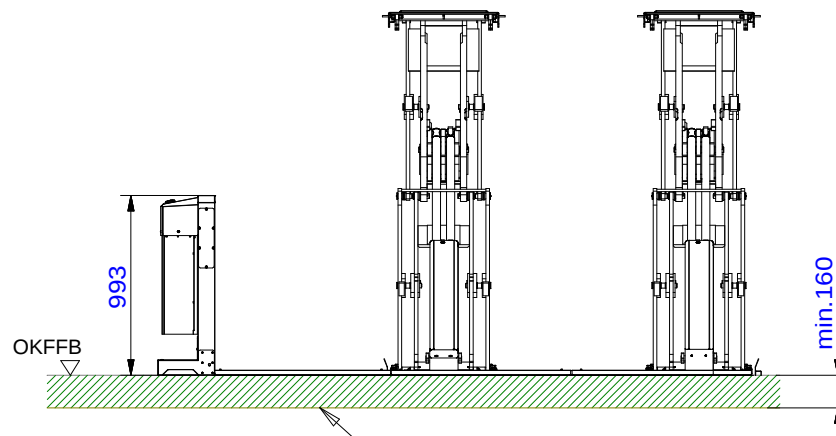

Betonqualitaet min. C20/25
normal bewehrt
*quality of concrete C20/25
normal armouring*

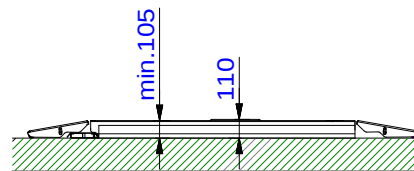

* Schienenlaene für kurze Version
platform length of short version

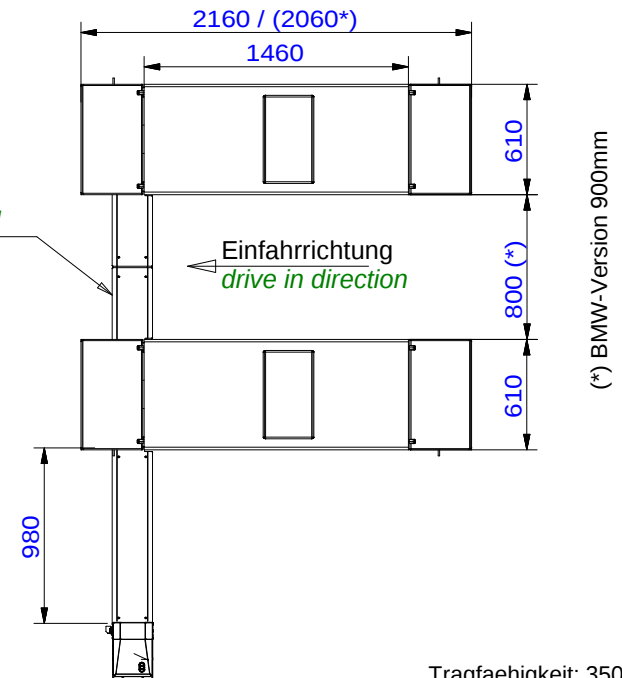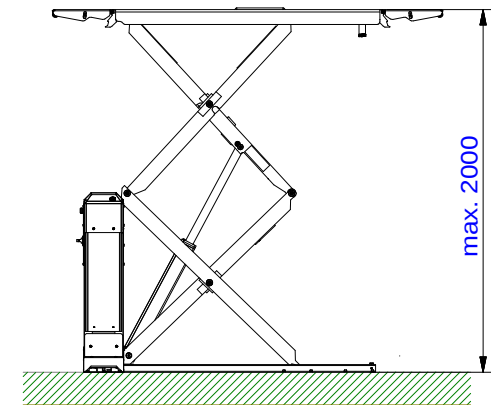

(*) BMW-Version 900mm

Bei Bestellung ist der Einbau-, Fundamentplan beizulegen oder die Zeichnungsnummer immer anzugeben.

If ordering, the foundation plan or drawing number must be specified in the order

Bauseits am Aggregat bereitstellen:
 Netzanschluss: 3x400V+PE oder 230V,50Hz
 Absicherung: 16 Ampere traee
*Prepared by customer at the operating unit:
 power supply: 3x400V+PE or 230V, 50Hz
 fuse: 16 Ampere, time lag*

*HF = Hyperflow technology
(HF controls the synchronisation of the hydraulic cylinders automatically.
During each full lifting process the pressure of hydraulic oil in the cylinders
is regulated. This eliminates the normally indispensable refilling of hydraulic
oil and synchronisation is guaranteed for a long time)*

Alle Maße in mm! / all dimensions in mm!
Mass- und Konstruktionsänderungen vorbehalten! dimensions and design changes reserved!

(3D CAD-Modell)				 Projektionsmethode 1 ISO 5456-2		Benennung / designation	
-	-	-	-		Datum	Name	Jumbo 3500 NT HF (Jumbo 3500 NT HF kurz) Überflureinbau
-	-	-	-	Bearb.	21.04.2015	MG	
-	-	-	-	Gepr.			
-	-	-	-				
-	-	-	-				Zeichnungsnummer / drawing number 7757_NB
-	-	-	-				
a	neues Design	19.10.22	MH	Korker Straße 24, 77694 Kehl www.nussbaumlifts.com			
ind.	Aender. / modification	Datum	Name				