

INGROUND 2-PISTON LIFT

TOP LIFT 2.35 TLAD

FLUSH MOUNTED



Wheel free system flush with platform

Turn table (optional accessory)

Sliding plate Precision 1200 mm 0016898 (optional accessory)

Installation frame


Drive on ramp 0016766 (optional accessory)

Length and crosswise adjustable aluminum slider plates

TECHNICAL DATA


| | |
|--------------------------------------|------------|
| capacity | 3500 kg |
| wheel free lift | 3500 kg |
| effect. raise height platform | 2008 mm |
| effect. raise height wheel free unit | 1982 mm |
| platform length | 4400 mm |
| platform height | 180 mm |
| drive over height wheel free unit | 60 mm |
| piston diameter | 123 mm |
| piston distance | 1500 mm |
| installation depth | 2443 mm |
| motor output | 3,0 kW |
| power connector | 400 V/16 A |
| cable length to control | 11 m |
| lifting time | ≈ 35 sec. |
| lowering time | ≈ 35 sec. |

| | |
|--|---------|
| Platform 2.35 TLAD with platform notches for wheel free system flush with platform, turn tables and sliding plates | 0016910 |
| Platform 2.35 TLAD with platform notches for wheel free system flush with platform | 0016909 |
| Platform 2.35 TLAD | 0017053 |
| Platform wheelfree 2.35 TLAD | 0016907 |
| Installation cassette 1500 mm TLAD | 0016905 |
| Lifting unit 3,5 t TLAD 1500 mm - K pre-assembled in installation cassette | 0017054 |
| Lifting unit 3,5 t TLAD 1500 mm - K for wheel free system, pre-assembled in installation cassette | 0016908 |
| Installation frame H 2-Stempel 4400 mm | 0016894 |

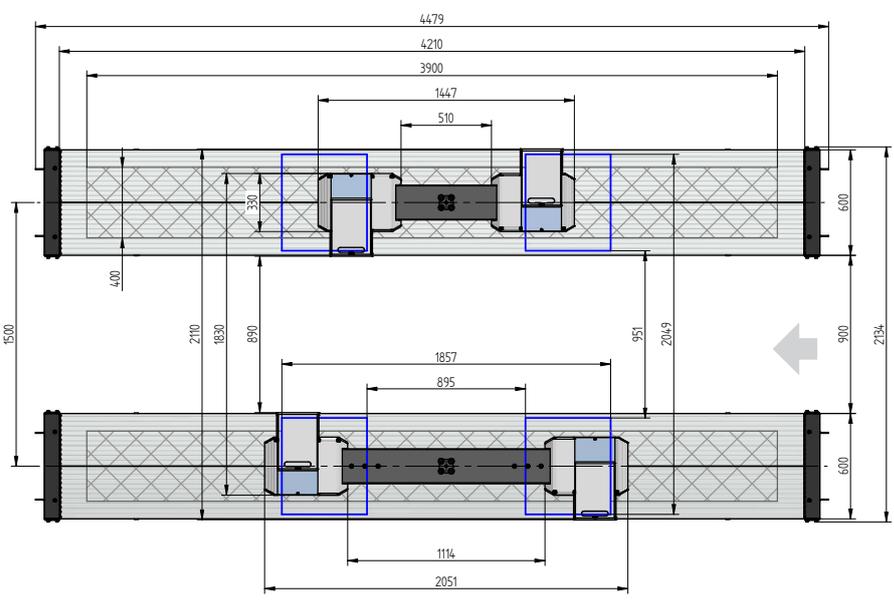




ACCESSORIES

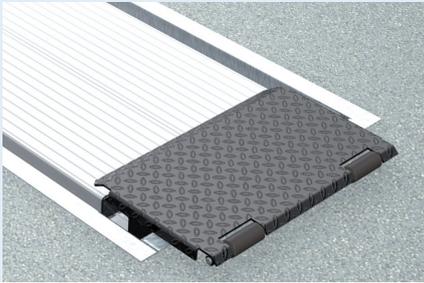

Drive on ramp

0016766



Sliding plate

Precision 1200 mm
0016898




Lighting

LED
0016903




Slide rail

4400 mm
0016899

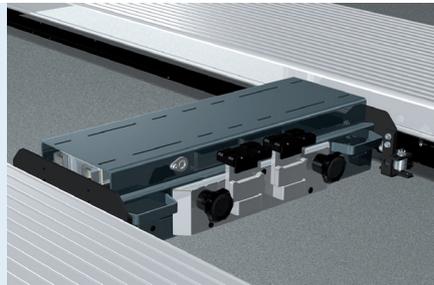


Axle Jack 2600 kg

pneumatic, without slide rails
0016767




Park position

for Axle Jack
0016768

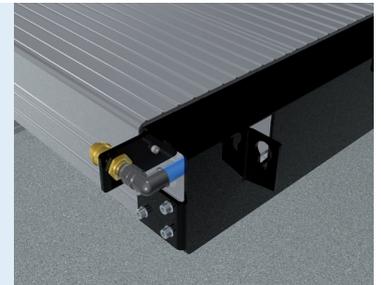

Compressed air supply

0016770

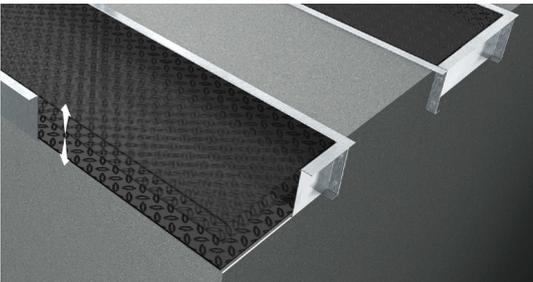


Autom. floor levelling system

2-piston TLAD 4400 mm
0016902




Wheel alignment supports

telescopic
0016771

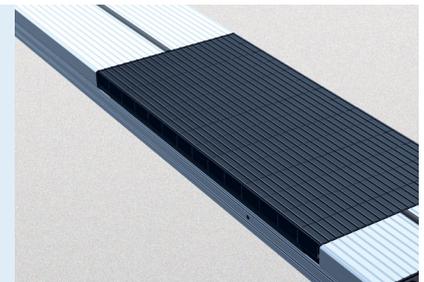

Rubber elements

50 mm 100 mm 200 mm
0017298 0017299 0017300

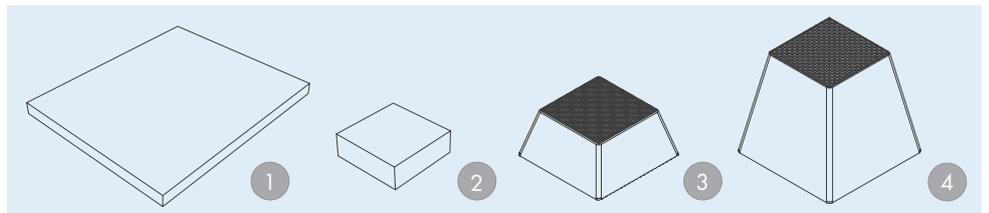

Rubber pads

1 | 290 x 335 x 20 mm 2 | 120 x 120 x 40 mm
0016740 0016739

Rubber pads Pyramid

3 | 70 mm 4 | 140 mm
0015742 0016738

Techn. changes and errors excepted.
 Valid from 01 2022 © Nussbaum Automotive Lifts
 GmbH | Korker Str. 24 | 77694 Kehl | Germany
 Tel.: +49 (0) 7853 899 - 0 | Fax: +49 (0) 7853
 8787 | info@nussbaumlifts.com | nussbaumlifts.com