
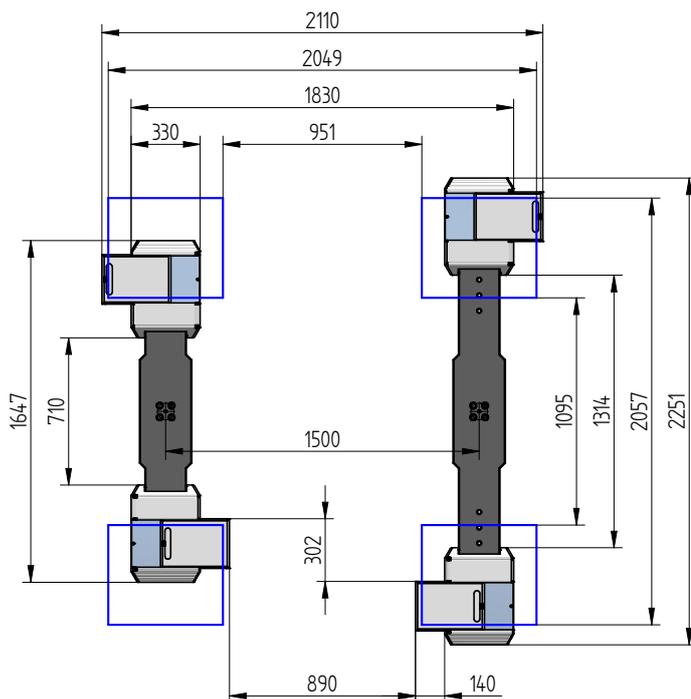


INGROUND 2-PISTON LIFT

TOP LIFT 2.35 TLD

FLUSH MOUNTED

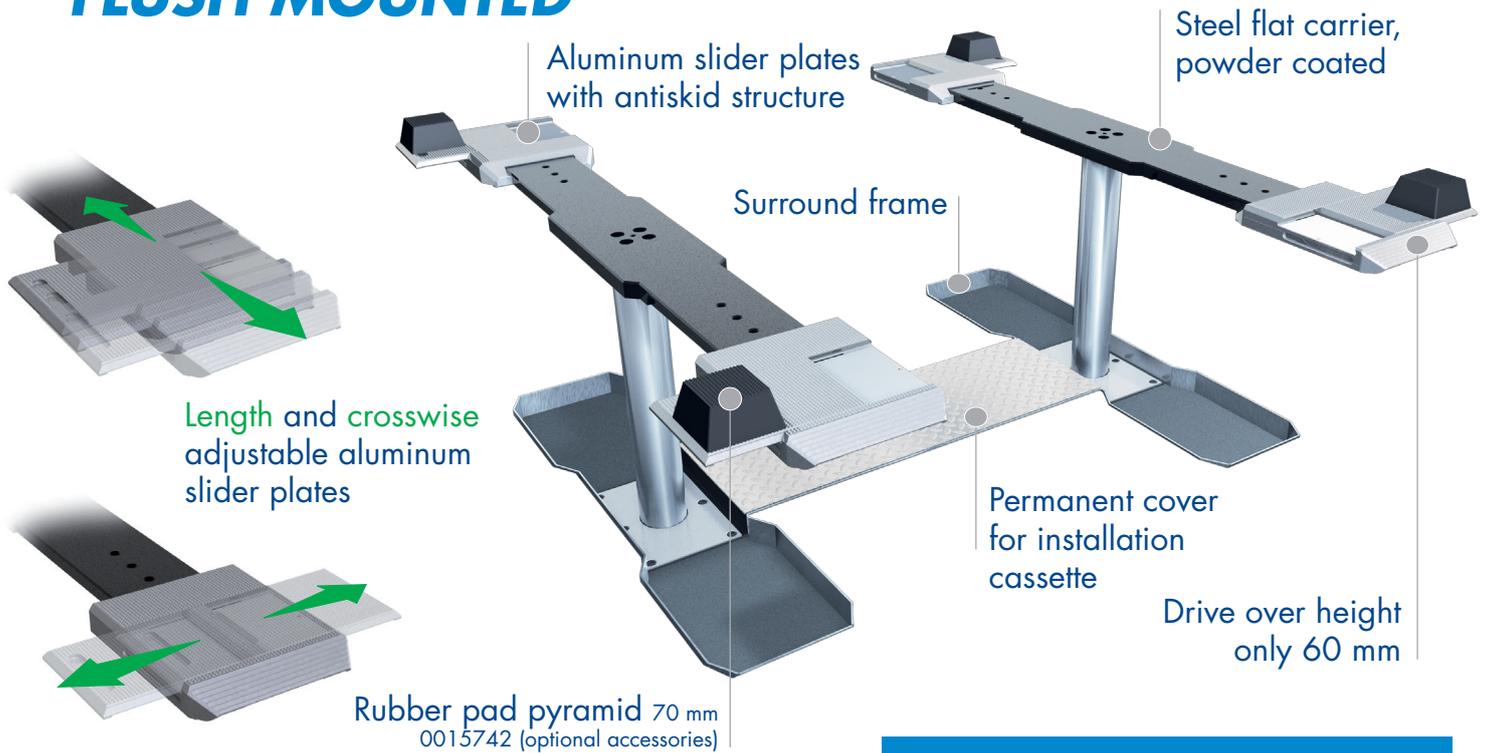


TECHNICAL DATA

| | |
|-------------------------|------------|
| Capacity | 3500 kg |
| Effective raise height | 2023 mm |
| Drive over height | 60 mm |
| Piston diameter | 123 mm |
| Piston distance | 1500 mm |
| Installation depth | 2408 mm |
| Motor output | 3,0 kW |
| Power connector | 400 V/16 A |
| Cable length to control | 11 m |
| Lifting time | ≈ 35 sec. |
| Lowering time | ≈ 35 sec. |


| | |
|--|---------|
| Support 2.35 TLD | 0015738 |
| Installation cassette 1500 mm | 0015739 |
| Lifting unit 3,5 t 1500 mm - K pre-assembled in installation cassette | 0016488 |
| Surround frame 2.35 TLD 1500 | 0015741 |




ACCESSORIES

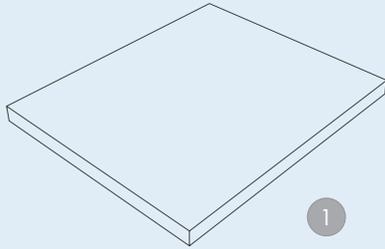


1



2



3




4

1 | **Rubber pad**
290 x 335 x 20 mm
0016740 (1Set / 4
Pieces)

2 | **Rubber pad**
120 x 120 x 40 mm
0016739 (1Set / 4
Pieces)

3 | **Rubber pad pyramid**
70 mm
0015742 (1Set / 4 Pieces)

4 | **Rubber pad pyramid**
140 mm
0016738 (1Set / 4 Pieces)

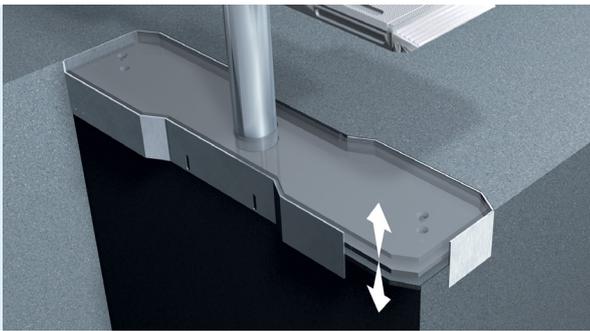

Floor compensation 2.35 TLD
galvanized
0016787



Levelling plates 2.35 TLD
for flat surface of the carriers
0016792 (1Set / 2 Pieces)

Levelling wedges 2.35 TLD
for flat surface of the slider plates
(1Set / 2 Pieces)