Nussbaum

INGROUND 4-PISTON LIFT

TOP LIFT 4.40 TLAD

FLUSH MOUNTED



Length and crosswise adjustable aluminum slider plates



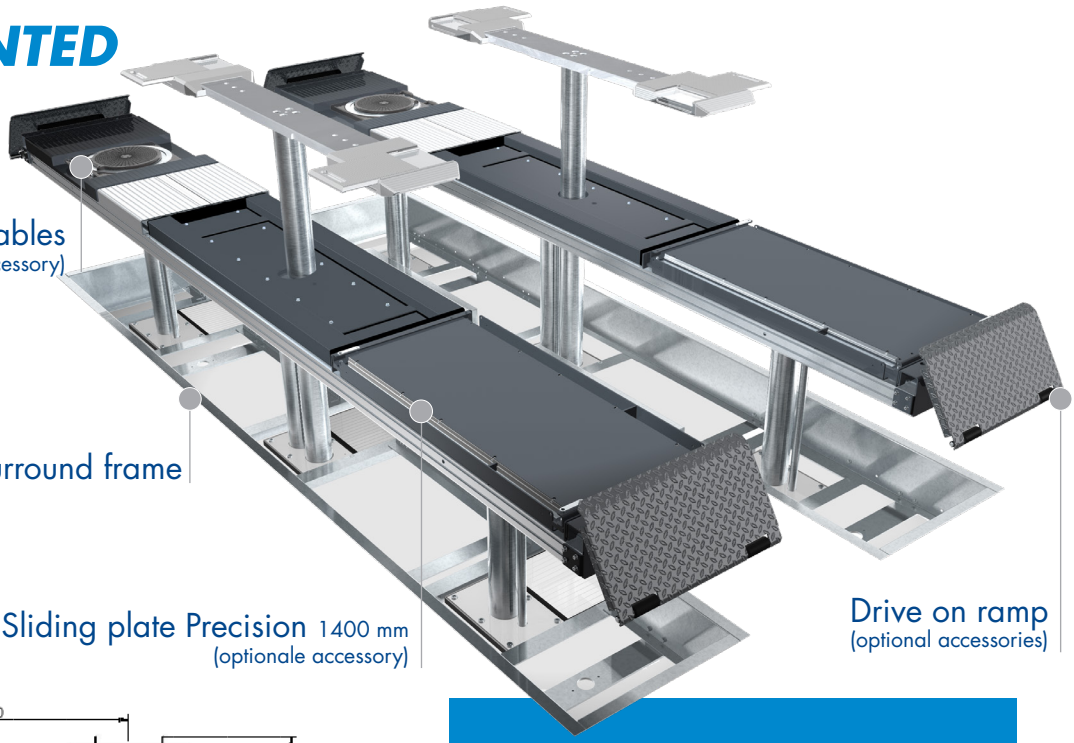

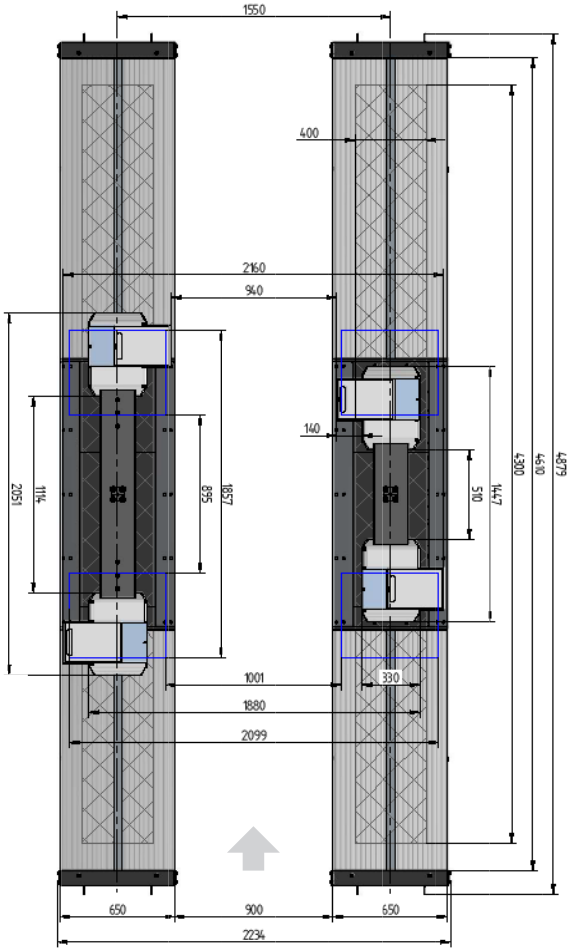

TECHNICAL DATA

capacity	4000	kg
wheel free lift	3500	kg
effect. raise height	2008	mm
effect. raise height wheel free lift	1982	mm
platform length	4800	mm
platform height	180	mm
drive over height wheel free lift	60	mm
piston diameter	123	mm
piston distance	1550	mm
installation depth	2443	mm
motor output	3,0	kW
power connector	400 V/16 A	
cable length to control	11	m
lifting time	≈ 35	sec.
lowering time	≈ 35	sec.

Platform 4.40 TLAD with platform notches for wheel free lift flush with runway	0016944
Platform 4.40 TLAD with platform notches for wheel free lift flush with runway, turn tables and sliding plates	0016945
Installation cassettes 1550 mm	0016942
Lifting unit 4,0 t /3,5 t 1550 mm - K pre-assembled in installation cassette	0016941
Surround frame 4.40 TLAD 4800 mm	0016947

ACCESSORIES



Drive on ramp
0016766



Sliding plate
Precision 1400 mm
0016939



Lighting
LED
0016903

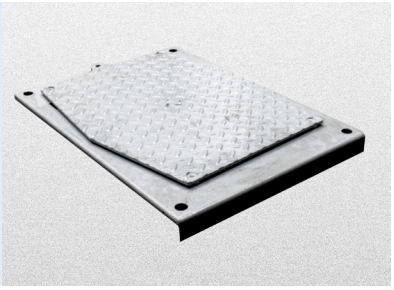

Playdetector

Slide rail
4800 mm
0016911

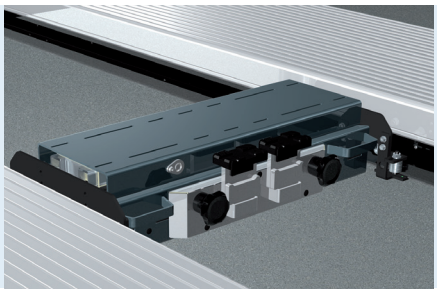

Axle Jack 2600 kg
pneumatic, without slide rails
0016767



Parkposition
for axle jack
0016768

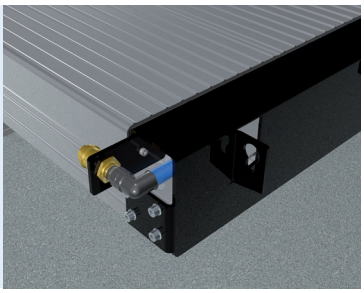

Compressed air supply
0016770

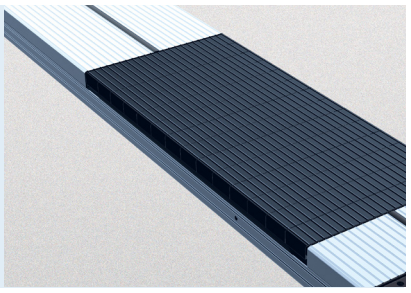

Rubber elements
50 mm 0017301
100 mm 0017302
200 mm 0017303

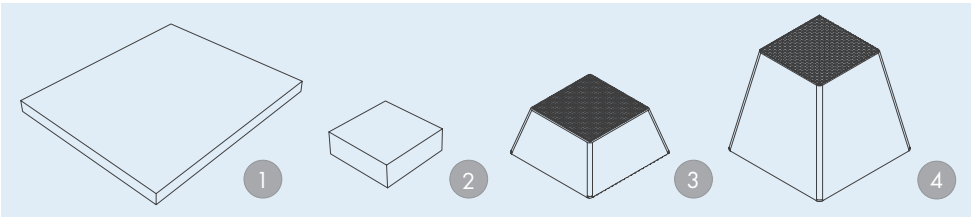

Rubber pads
1 | 290 x 335 x 20 mm 0016740
2 | 120 x 120 x 40 mm 0016739

Rubber pads Pyramid
3 | 70 mm 0015742
4 | 140 mm 0016738

Techn. Änderungen und Fehler vorbehalten. Gilt ab 01 2022
© Nussbaum Automotive Lifts GmbH | Korker Str. 24
77694 Kehl | Deutschland
Tel.: +49 (0) 7853 899 – 0 | Fax: +49 (0) 7853 8787
info@nussbaumlifts.com | nussbaumlifts.com